

SEEXEL

Edge-lit Aluminum Exit Sign

ILLUMINATION:

- Ultra bright, energy efficient, long life Red or Green LEDs.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.

ELECTRICAL:

- Dual 120/277 voltage standard.
- Charge rate/power LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING: Aluminum mounting canopy included for top, end or back mount.

HOUSING:


- Premium-grade, extruded aluminum housing (also available in optional black or white powder-coated finishes).
- Self-adhesive Chevron appliques and guide template provided for directional indication.

OPTIONS:

- 2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- USA: Substantial transformation assembly in the U.S. complies with Assembled in the USA under the Buy American Act.
- SPV: UL Listed for 208/220/240 Volt, 50/60Hz.
- Custom: Signs available with requested special wording.



Dimensions

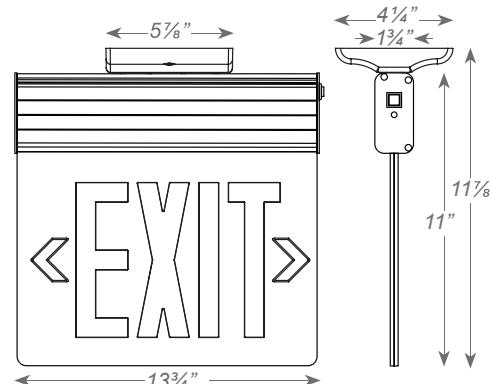

WARRANTY & LISTINGS:

- 5 Year Limited Warranty on all Electronics and Housing
- Battery Prorated for 5 Years
- Meets UL924, NFPA 101 Life safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for Damp Locations (0°C-50°C)
- Certified to CEC Under Title 20 Regulations

STANDARD



OPTIONAL



ORDERING INFORMATION

Sample Part Number: SEEXEL1RCAEM

MODEL	No. of FACES	LETTER COLOR	PANEL	HOUSING COLOR	BATTERY	OPTIONS
SEEXEL	1	Single Face	R Red	C Clear ¹	W White (blank)	2C-120 Dual Circuit With 120V Input ²
	2	Double Face	G Green	M Mirror W White	EM Battery Backup	2C-277 SDT USA SPV CUSTOM

¹ With single face only.

² Available only with AC units.

³ Available only with EM units.

⁴ Not available with SDT.

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)					INPUT AMPS (A)				
	120V	277V	208V	220V	240V	120V	277V	208V	220V	240V
SEEXEL-RED/GREEN/EM SPV	3.6	4.0	3.9	3.93	3.98	0.080	0.020	0.022	0.022	0.020
SEEXEL-RED/GREEN/SDT/2C	3.6	4.0	-	-	-	0.080	0.020	-	-	-