

SNL928- Series

Outdoor Billboard Sign Units

This billboard unit provides high light levels with even distribution, for spot lighting. The unit is weather resistant and suitable for most outdoor applications.


Construction: Powder-coated white aluminum housing with cast-aluminum end plates and a clear acrylic diffuser.

Electrical: All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminaire Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp and wet location


Mounting: Units are designed to be conduit mounted either individually, tandem, or in a continuous run

WARRANTY & LISTINGS:

- 5-year warranty of all electronics and housing.
- UL Certified for wet location
- DLC 5.1



DIMENSIONS

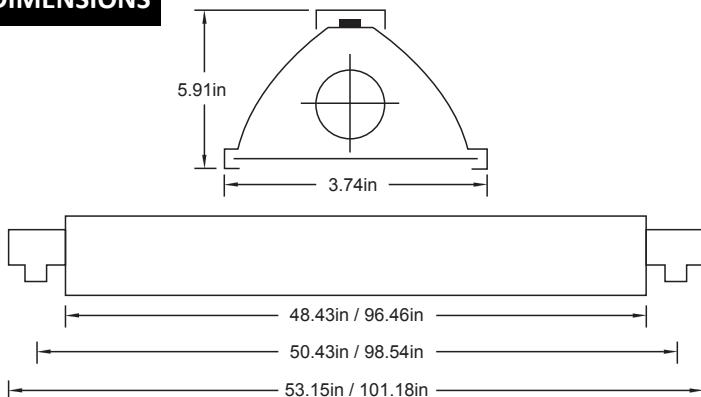

Ordering Guide

SKU	SNL-924-60-ACL-V4-D-S1			SNL-928-120-ACL-V8-D-S1		
System Wattage	38W-48W-60W Field Adjustable			76W-96W-120W Field Adjustable		
Efficacy	up to 156 LPW @ High Wattage					
Lumens	8350 lms	9350 lms	8850 lms	16700 lms	18700 lms	17700 lms
	139 LPW	156 LPW	148 LPW	139 LPW	156 LPW	148 LPW
	@3000K, 60W	@4000K, 60W	@5000K, 60W	@3000K, 120W	@4000K, 120W	@5000K, 120W
Input Voltage	120-277Vac / 120-347Vac					
CCT	3000K-4000K-5000K Field Adjustable					
CRI	>80					
Ambient Temp.	-30°C~40°C (-22°F~104°F)					
LED Performance	L70>50000H					
Warranty	5-year warranty (for downlight only)					